
# Visor screws - Mounting instructions
# Visierschrauben - Montageanleitung

HKar13

Place the enclosed washers - with the smooth side facing the visor - between the helmet and the visor as shown below. Tighten the screws until the desired level of movement of the visor is achieved. The use of a screwdriver is usually not required for this purpose.

**Warning:** Over-tightening the screws can damage the inserts on the helmet and make them unusable!

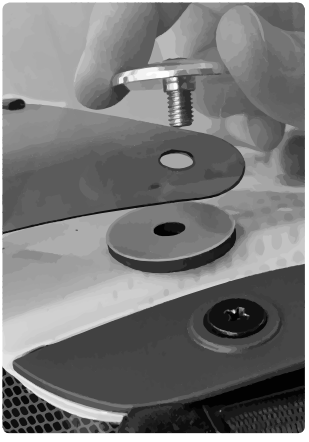

Platziere die beigefügten Scheiben - mit der glatten Seite dem Visier zugewandt - wie abgebildet zwischen Helm und Visierscheibe. Ziehe die Schrauben so weit an, bis die gewünschte Beweglichkeit des Visiers erreicht ist. Die Zuhilfenahme eines Schraubendrehers ist dazu gewöhnlich nicht erforderlich.

**Achtung:** Durch zu starkes anziehen der Schrauben können die Gewindeeinsätze am Helm beschädigt/unbrauchbar werden!